



#### DESCRIPTIVE

- Electronic governor
- Mechanically welded chassis with antivibration suspension
- Main line circuit breaker
- Radiator for core temperature of 48/50°C max with mechanical fan
- Protective grille for fan and rotating parts (CE option)
- 9 dB(A) silencer supplied separately
- Charger DC starting battery with electrolyte
- 24 V charge alternator and starter
- Delivered with oil and coolant -30°C
- Manual for use and installation

#### POWER DEFINITION

PRP : Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1. ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. Overload is not allowed.

#### TERMS OF USE

According to the standard, the nominal power assigned by the genset is given for 25°C Air Inlet Temperature, of a barometric pressure of 100 kPA (100 m A.S.L), and 30 % relative humidity. For particular conditions in your installation, refer to the derating table.

#### ASSOCIATED UNCERTAINTY

For the generating sets used indoor, where the acoustic pressure levels depends on the installation conditions, it is not possible to specify the ambient noise level in the exploitation and maintenance instructions . You will also find in our exploitation and maintenance instructions a warning concerning the air noise dangers and the need to implement appropriated preventive measures.

## V440C2

Engine ref.	TAD1344GE
Alternator ref.	KH01741T
Performance class	G3

#### GENERAL CHARACTERISTICS

Frequency (Hz)	50 Hz
Voltage (V)	400/230
Standard Control Panel	APM403
Optional control panel	APM802
Optional Control Panel	M80
Optional control panel	TELYS

#### POWER

Voltage	ESP		PRP		Standby Amps
	kWe	kVA	kWe	kVA	
415/240	352	440	320	400	612
400/230	352	440	320	400	635
380/220	348	435	316	395	661
200/115	352	440	320	400	1270
240 TRI	352	440	320	400	1059
230 TRI	352	440	320	400	1105
220 TRI	352	440	320	400	1155

#### DIMENSIONS COMPACT VERSION

Length (mm)	3160
Width (mm)	1340
Height (mm)	1805
Dry weight (kg)	3110
Tank capacity (L)	470

#### DIMENSIONS AND NOISE LEVELS In compliance with 2000/14/CE standard

Type soundproofing	M228
Length (mm)	4475
Width (mm)	1410
Height (mm)	2430
Dry weight (kg)	4080
Tank capacity (L)	470
Acoustic pressure level @1m in dB(A)	78
Sound power level guaranteed (Lwa)	98
Acoustic pressure level @7m in dB(A)	68



## V440C2

### ENGINE CHARACTERISTICS

#### GENERAL ENGINE DATA

Engine brand	VOLVO
Engine ref.	TAD1344GE
Air inlet system	Turbo
Cylinders configuration	L
Number of cylinders	6
Displacement (L)	12,78
Charge Air coolant	Air/Air DC
Bore (mm) x Stroke (mm)	131 x 158
Compression ratio	18.1 : 1
Speed (RPM)	1500
Pistons speed (m/s)	7,90
Maximum stand-by power at rated RPM (kW)	399
Frequency regulation, steady state (%)	+/- 0.5%
BMEP (bar)	22,70
Governor type	Electronic

#### COOLING SYSTEM

Radiator & Engine capacity (L)	44
Fan power (kW)	10
Fan air flow w/o restriction (m3/s)	7,90
Available restriction on air flow (mm H2O)	20
Type of coolant	Glycol-Ethylene

#### EMISSIONS

Emission PM (mg/Nm3) 5% O2
Emission CO (mg/Nm3) 5% O2
Emission NOx (mg/Nm3) 5% O2
Emission HC (mg/Nm3) 5% O2

#### EXHAUST

Exhaust gas temperature @ ESP 50Hz (°C)	465
Exhaust gas flow @ ESP 50 Hz (L/s)	1125
Max. exhaust back pressure (mm H2O)	1000

#### FUEL

Consumption @ 110% load (L/h)	91,50
Consumption @ 100% load (L/h)	83,10
Consumption @ 75% load (L/h)	63,30
Consumption @ 50% load (L/h)	42,80
Maximum fuel pump flow (L/h)	120

#### OIL

Oil capacity (L)	36
Min. oil pressure (bar)	
Max. oil pressure (bar)	
Oil consumption 100% ESP (L/h)	0
Oil sump capacity (L)	30

#### HEAT BALANCE

Heat rejection to exhaust (kW)	266
Radiated heat to ambient (kW)	15
Heat rejection to coolant HT (kW)	155

#### AIR INTAKE

Max. intake restriction (mm H2O)	510
Intake air flow (L/s)	467



# V440C2


## ALTERNATOR CHARACTERISTICS

GENERAL DATA		OTHER DATA	
Alternator ref.	KH01741T	Continuous Nominal Rating 40°C (kVA)	400
Number of Phase	Three phase	Standby Rating 27°C (kVA)	440
Power factor (Cos Phi)	0,80	Efficiencies 100% of load (%)	93,10
Altitude (m)	0 à 1000	Air flow (m3/s)	0,90
Overspeed (rpm)	2250	Short circuit ratio (Kcc)	0,2940
Number of pole	4	Direct axis synchro reactance unsaturated (Xd) (%)	393
Capacity for maintaining short circuit at 3 In for 10 s	No	Quadra axis synchro reactance unsaturated (Xq) (%)	200
Insulation class	H	Open circuit time constant (T'do) (ms)	1771
T° class (H/125°), continuous 40°C	H / 125°K	Direct axis transient reactance saturated (X'd) (%)	22,10
T° class (H/163°C), standby 27°C	H / 163°K	Short circuit transient time constant (T'd) (ms)	100
AVR Regulation	Yes	Direct axis subtransient reactance saturated (X''d) (%)	15,50
Total Harmonic Distortion in no-load DHT (%)	<2	Subtransient time constant (T''d) (ms)	10
Total Harmonic Distortion, on linear load DHT (%)	<2	Quadra axis subtransient reactance saturated (X''q) (%)	20,90
Wave form : NEMA=TIF	<50	Subtransient time constant (T''q) (ms)	10
Wave form : CEI=FHT	<2	Zero sequence reactance unsaturated (Xo) (%)	0,90
Number of bearing	1	Negative sequence reactance saturated (X2) (%)	18,26
Coupling	Direct	Armature time constant (Ta) (ms)	15
Voltage regulation at established rating (+/- %)	0,50	No load excitation current (io) (A)	0,85
Recovery time (Delta U = 20% transient) (ms)	500	Full load excitation current (ic) (A)	3,92
Indication of protection	IP 23	Full load excitation voltage (uc) (V)	67,10
Technology	Without collar or brush	Engine start (Delta U = 20% perm. or 30% trans.) (kVA)	571,36
		Transient dip (4/4 load) - PF : 0,8 AR (%)	19
		No load losses (W)	5158,09
		Heat rejection (W)	23478,15
		Unbalanced load acceptance ratio (%)	70

## DIMENSIONS

DIMENSIONS AND NOISE LEVELS In compliance with 2000/14/CE standard		Dimensions soundproofed version	
Type soundproofing	M228	Type soundproofing	M228
Length (mm)	4475	Length (mm)	4475
Width (mm)	1410	Width (mm)	1410
Height (mm)	2430	Height (mm)	2430
Dry weight (kg)	4080	Dry weight (kg)	4080
Tank capacity (L)	470	Tank capacity (L)	470
Acoustic pressure level @1m in dB(A)	78	Acoustic pressure level @1m in dB(A)	81
Sound power level guaranteed (Lwa)	98	Sound power level guaranteed (Lwa)	101
Acoustic pressure level @7m in dB(A)	68	Acoustic pressure level @7m in dB(A)	71
Dimensions DW compact version		DIMENSIONS DW AND NOISE LEVELS In compliance with 2000/14/CE standard	
Length (mm)	4527	Type soundproofing	M228 DW
Width (mm)	1400	Length (mm)	4527
Height (mm)	2065	Width (mm)	1410
Dry weight (kg)	3660	Height (mm)	2700
Tank capacity (L)	1368	Dry weight (kg)	4740
		Tank capacity (L)	1368
		Acoustic pressure level @1m in dB(A)	78
		Sound power level guaranteed (Lwa)	98
		Acoustic pressure level @7m in dB(A)	68

APM403, basic generating set and power plant control

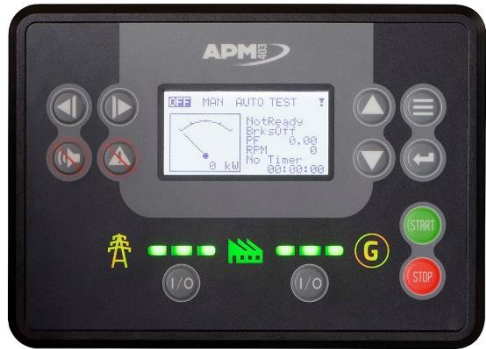

The APM403 is a versatile control unit which allows operation in manual or automatic mode  
 Measurements : voltage and current  
 kW/kWh/kVA power meters  
 Standard specifications: Voltmeter, Frequency meter.  
 Optional : Battery ammeter.  
 J1939 CAN ECU engine control  
 Alarms and faults: Oil pressure, Coolant temperature, Overspeed, Start-up failure, alternator min/max, Emergency stop button.  
 Engine parameters: Fuel level, hour counter, battery voltage.  
 Optional (standard at 24V): Oil pressure, water temperature.  
 Event log/ Management of the last 300 genset events.  
 Mains and genset protection  
 Clock management  
 USB connections, USB Host and PC,  
 Communications : RS485 INTERFACE  
 ModBUS protocol /SNMP  
 Optional : Ethernet, GPRS, remote control, 3G, 4G, Websupervisor, SMS, E-mails

APM802 dedicated to power plant management



The new APM802 command/control system is specifically designed for operating and monitoring power plants for markets including hospitals, data centres, banks, the oil and gas sector, industries, IPP, rental and mining. This unit is available as standard on all generating sets from 275 Kva designed for coupling. It is optional on the rest of our range.  
 The Human Machine Interface, designed in collaboration with a company specialising in interface design, facilitates operations with a large 100% touch screen. The pre-configured system for power plant applications features a brand new customisation function which complies with the international standard IEC 61131-3. New communication functions (PLC and regulation), improve the high level of equipment availability in the installation.

- Advantages:
- Dedicated to power plant management.
  - Specially researched ergonomics.
  - High level of equipment availability.
  - Modularity and long service life guaranteed.
  - Making it easy to extend the installation

For more information, please refer to the sales documentation.

## M80, transfer of information



The M80 is a dual-function control unit. It can be used as a basic terminal block for connecting a control box and as an instrument panel with a direct read facility, with displays giving a global view of your generating set's basic parameters.

Offers the following functions:

Engine parameters: tachometer, working hours counter, coolant temperature indicator, oil pressure indicator, emergency stop button, customer connection terminal block, CE.

## TELYS, ergonomic and user-friendly



The highly versatile TELYS control unit is complex yet accessible, thanks to the particular attention paid to optimising its ergonomics and ease of use. With its large display screen, buttons and scroll wheel, it places the accent on simplicity and communication.

The TELYS offers the following functions:

Electrical measurements: voltmeter, frequency meter, ammeter.

Engine parameters: working hours counter, oil pressure, coolant temperature, fuel level, engine speed, battery voltage.

Alarms and faults: oil pressure, coolant temperature, failure to start, overspeed, alternator min./max., battery voltage min./max., emergency stop, fuel level.

Ergonomics: wheel for navigating around the various menus.

Communication: remote control and operation software, USB connections, PC connection.

For more information on the product and its options, please refer to the sales documentation.